

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

RR-493 PCT/US

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/018283

INTERNATIONAL APPLICATION NO.
PCT/FI00/00420INTERNATIONAL FILING DATE
10 May 2000PRIORITY DATE CLAIMED
11 May 1999TITLE OF INVENTION **CAMERA SYSTEM AND DISPLAY DEVICE**APPLICANT(S) FOR DO/EO/US **Hannu SAARELMA**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - a) PCT International Publication WO 00/72089 A1 dated 30 November 2000 with International Search Report dated 24 August 2000.
 - b) PCT International Preliminary Examination Report dated August 14 2001 with amended claim sheets pages 14, 15, 16, 17, 18 dated 4 July 2001.

☒ The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO \$1,040.00

International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO. \$890.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but
international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS PTO USE ONLY

\$ 1,040 961

\$ 130 254

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☒ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	27 - 20 =	7	X \$18.00
Independent claims	1 - 3 =	0	X \$80.00

MULTIPLE DEPENDENT CLAIM(S) (if applicable) + \$270.00

TOTAL OF ABOVE CALCULATIONS =

\$ 1,296

☒ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above
are reduced by 1/2.

\$ 648

SUBTOTAL =

\$ 648

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$ 0

TOTAL NATIONAL FEE =

\$ 648

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

\$ 0

TOTAL FEES ENCLOSED =

\$ 648

Amount to be
refunded: \$
charged: \$

a. ☒ A Credit Card Payment Form is enclosed to cover the above fees.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 18-1743. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO

RODMAN & RODMAN
7 South Broadway
White Plains, New York 10601

Telephone: (914) 949-7210
Facsimile: (914) 993-0668

Philip Rodman
SIGNATURE

Philip Rodman

NAME

25, 704

REGISTRATION NUMBER

November 8, 2001



APPLICATION DATA SHEET

I. Application Information

(a) Application type : Regular

(b) Subject Matter (check one):

1. ☐ Utility
2. ☐ Design
3. ☐ Plant

(c) Title of Invention : CAMERA SYSTEM AND DISPLAY DEVICE

(d) Attorney Docket Number : RR-493 PCT/US

(e) Total Drawing Sheets :

(f) Small entity (check one) :

1. ☐ Yes
2. ☐ No

II. Applicant Information

1. INVENTOR ONE

First Name:	Hannu
Middle Name:	
Last Name:	Saarelma
Name Suffix (Jr., Sr., III, etc.):	

RESIDENCE

City:	Espoo
State/Province:	Finland
Country:	Finland

MAILING ADDRESS

Street:	P.O. Box 6400
City:	TKK
State/Province:	Finland
Country:	Finland
Postal or Zip Code:	FIN-02015

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Hannu SAARELMA

Serial No.:

Group Art Unit:

Filing Date:

Examiner:

International Application No.: PCT/FI00/00420

International Filing Date: May 10, 2000

Priority Date Claimed: May 11, 1999

Title: **CAMERA SYSTEM AND DISPLAY DEVICE**

Entity Status: Small Entity


Our Docket: RR-493 PCT/US

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as EXPRESS MAIL Customer Receipt No. EL042404045US in an envelope addressed to:

Commissioner for Patents
Box PCT
Washington, D.C. 20231

on November 8, 2001


Applicant's Attorney

Commissioner Patents
Box PCT
Washington, D.C. 20231

FIRST PRELIMINARY AMENDMENT
UNDER MPEP 506 TO REDUCE FILING FEES

Sir:

Please enter the following amendments before calculating the filing fee for this application:

Claim 3, change the claim dependency from "claim 1 or 2",
to --claim 1--.

2001-11-08 10:01:23

Claim 4, change the claim dependency from “claim 1 - 3”,

to --claim 1--.

Claim 6, change the claim dependency from “any one of claims 1 - 5”,

to --claim 1--.

Claim 7, change the claim dependency from “any one of claims 1 - 6”,

to --claim 1--.

Claim 8, change the claim dependency from “any one of claims 1 - 6”,

to --claim 1--.

Claim 9, change the claim dependency from “any one of claims 1 - 6”,

to --claim 1--.

Claim 10, change the claim dependency from “any one of claims 1 - 9”,

to --claim 1--.

Claim 11, change the claim dependency from “any one of claims 1 - 10”,

to --claim 1--.

Claim 12, change the claim dependency from “any one of claims 1 - 11”,

to --claim 1--.

Claim 13, change the claim dependency from “any one of claims 1 - 12”,

to --claim 1--.

Claim 14, change the claim dependency from “any one of claims 1 - 13”,

to --claim 1--.

Claim 15, change the claim dependency from “any one of claims 1 - 14”,

to --claim 1--.

Claim 16, change the claim dependency from “any one of claims 1 - 15”,
to --claim 1--.

Claim 21, change the claim dependency from “any one of claims 16 - 20”,
to --claim 16--.

Claim 23, change the claim dependency from “claim 21 or 22”,
to --claim 21--.

Claim 24, change the claim dependency from “any one of claims 21 - 23”,
to --claim 21--.

Claim 26, change the claim dependency from “claim 24 or 25”,
to --claim 24--.

Claim 27, change the claim dependency from “any one of claims 21 - 26”,
to --claim 21--.

MARKED-UP VERSION OF AMENDED CLAIMS

3. Camera system as defined in claim 1 [or 2], characterized in that photosensitive detecting elements are CCD elements.

4. Camera system as defined in claim 1 [- 3], characterized in that the number of detecting elements is of the order of 100000 or higher.

6. Camera system as defined in [any one of claims 1 - 5] claim 1, characterized in that the optics (2) has been so arranged that, in the high-resolution area near the optic axis (L), the point spread function (PSF) produced by the optics integrates over several detecting elements to prevent aliasing.

7. Camera system as defined in [any one of claims 1 - 6] claim 1, characterized in that the optics (2) is of a type having a so-called normal focal distance and the image surface (3) is a spherical calotte with a recording angle of the order of 60°; and that the camera comprises a shutter (4) disposed between
5 the optics and the image surface and provided with an adjustable aperture.

8. Camera system as defined in [any one of claims 1 - 6] claim 1, characterized in that the recording angle of the image surface (3) is 180° or less.

9. Camera system as defined in [any one of claims 1 - 6] claim 1,
characterized in that the optics (2) comprises a lens (5) with a short focal
distance, such as a so-called fish-eye lens; that the image surface (3) is of a
hemispherical shape and the recording angle is 180°, the camera thus being of a
5 semispace recording type.

10. Camera system as defined in [any one of claims 1 - 9] claim 1,
characterized in that the camera (1) is a digital camera which comprises means
for digitization of the signals received from the detecting elements and means for
transferring the digitized images to a computer.

11. Camera system as defined in [any one of claims 1 - 10] claim 1,
characterized in that the camera (1) is of a type for recording moving pictures.

12. Camera system as defined in [any one of claims 1 - 11] claim 1,
characterized in that the camera (1) is of a type for recording still pictures.

13. Camera system as defined in [any one of claims 1 - 12] claim 1,
characterized in that the camera (1) is a monitoring camera.

14. Camera system as defined in [any one of claims 1 - 13] claim 1,
characterized in that the system comprises two semispace recording cameras (1)
directed in opposite directions for the recording of the whole space.

15. Camera system as defined in [any one of claims 1 - 14] claim 1, characterized in that the system comprises two adjacent semispace recording cameras (1) directed in the same direction for the recording of a stereo image of the semispace.

16. Display device (6) for displaying an image recorded by a camera system as defined in [any one of claims 1 - 15] claim 1 on the display surface (7) of the display device, characterized in that the display surface (7) is a concave spherical surface.

21. Display device as defined in [any one of claims 16 - 20] claim 16, characterized in that the display surface (7) consists of a matrix of individual picture elements.

23. Display device as defined in claim 21 [or 22], characterized in that the number of picture elements has been so chosen that, in order to achieve a reasonable image quality, the number is of the order of 10^4 - 3×10^4 , to achieve a good image quality, of the order of 10^6 - 2×10^6 , or to achieve a perfect image quality, of the order of 10^8 .

24. Display device as defined in [any one of claims 21 - 23] claim 21, characterized in that the picture elements are so arranged on the display surface (7) that their density is at a maximum on the optic axis (L) and diminishes from the optic axis toward the edge zones.

26. Display device as defined in claim 24 [or 25], characterized in that the density distribution of the picture elements on the display surface is consistent with the function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$

where

I_0 = picture element density at the origin (on the optic axis),

$I(r)$ = local picture element density at radius r from the origin, and

a = scaling factor.

27. Display device as defined in [any one of claims 21 - 26] claim 21, characterized in that the picture elements are implemented using fiber optics.

CLEAN VERSION OF ALL PENDING CLAIMS

1. Camera system comprising a camera (1) provided with an optics system (2) and a photosensitive image surface (3) disposed near the optics system symmetrically relative to its optic axis (L), the image of the object (K) refracted by the optics being projected onto the image surface, the photosensitive image surface (3) being a concave spherical surface whose center of curvature is at the focal point of the optics (2) and consisting of a matrix of individual photosensitive detecting elements, characterized in that the detecting elements are so arranged on the image surface (3) that their density is at a maximum on the optic axis (L) and diminishes from the optic axis toward the edge zones.

2. Camera system as defined in claim 1, characterized in that the density distribution of the detecting elements on the image surface (3) is consistent with the function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$

where

I_0 = density of detecting elements at the origin (on the optic axis),

$I(r)$ = local density of detecting elements at radius r from the origin, and

a = scaling factor.

3. Camera system as defined in claim 1, characterized in that photosensitive detecting elements are CCD elements.

4. Camera system as defined in claim 1, characterized in that the number of detecting elements is of the order of 100000 or higher.

10018283-031802

5. Camera system as defined in claim 4, characterized in that the number of detecting elements has been so chosen that, to achieve a reasonable image quality, the number is of the order of $10^4 - 3 \times 10^4$, to achieve a good image quality, of the order of $10^6 - 2 \times 10^6$, or to achieve a perfect image quality, of the order of 10^8 .

6. Camera system as defined in claim 1, characterized in that the optics (2) has been so arranged that, in the high-resolution area near the optic axis (L), the point spread function (PSF) produced by the optics integrates over several detecting elements to prevent aliasing.

7. Camera system as defined in claim 1, characterized in that the optics (2) is of a type having a so-called normal focal distance and the image surface (3) is a spherical calotte with a recording angle of the order of 60° ; and that the camera comprises a shutter (4) disposed between the optics and the image surface and provided with an adjustable aperture.

8. Camera system as defined in claim 1, characterized in that the recording angle of the image surface (3) is 180° or less.

9. Camera system as defined in claim 1, characterized in that the optics (2) comprises a lens (5) with a short focal distance, such as a so-called fish-eye lens; that the image surface (3) is of a hemispherical shape and the recording angle is 180° , the camera thus being of a semispace recording type.

10. Camera system as defined in claim 1, characterized in that the camera (1) is a digital camera which comprises means for digitization of the signals received from the detecting elements and means for transferring the digitized images to a computer.

11. Camera system as defined in claim 1, characterized in that the camera (1) is of a type for recording moving pictures.

12. Camera system as defined in claim 1, characterized in that the camera (1) is of a type for recording still pictures.

13. Camera system as defined in claim 1, characterized in that the camera (1) is a monitoring camera.

14. Camera system as defined in claim 1, characterized in that the system comprises two semispace recording cameras (1) directed in opposite directions for the recording of the whole space.

15. Camera system as defined in claim 1, characterized in that the system comprises two adjacent semispace recording cameras (1) directed in the same direction for the recording of a stereo image of the semispace.

16. Display device (6) for displaying an image recorded by a camera system as defined in claim 1 on the display surface (7) of the display device, characterized in that the display surface (7) is a concave spherical surface.

17. Display device as defined in claim 16, characterized in that the display device (6) is a monitor, such as a computer monitor or a television, the screen of which is a display surface (7) having the shape of a concave spherical calotte.

18. Display device as defined in claim 16, characterized in that the display surface (7) is a wall or ceiling surface of a room, onto which an image can be projected so as to allow it to be viewed simultaneously by a plurality of persons.

19. Display device as defined in claim 16, characterized in that the display device is a personal display visor or the like, in which the display surface (7) is a hemispherical display surface having its center at the focal point of the eye.

20. Display device as defined in claim 19, characterized in that the display visor or the like comprises two hemispherical display surfaces (7) with their centers at the focal points of the eyes, one display surface being provided for each eye for the viewing of stereo images.

21. Display device as defined in claim 16, characterized in that the display surface (7) consists of a matrix of individual picture elements.

22. Display device as defined in claim 21, characterized in that the number of picture elements is of the order of 100000 or higher.

23. Display device as defined in claim 21, characterized in that the number of picture elements has been so chosen that, in order to achieve a reasonable image quality, the number is of the order of $10^4 - 3 \times 10^4$, to achieve a good image quality, of the order of $10^6 - 2 \times 10^6$, or to achieve a perfect image quality, of the order of 10^8 .

24. Display device as defined in claim 21, characterized in that the picture elements are so arranged on the display surface (7) that their density is at a maximum on the optic axis (L) and diminishes from the optic axis toward the edge zones.

25. Display device as defined in claim 24, characterized in that the picture elements of the hemispherical display surface (7) are larger in surface area in the edge zones than in the vicinity of the optic axis (L).

26. Display device as defined in claim 24, characterized in that the density distribution of the picture elements on the display surface is consistent with the function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$

where

I_0 = picture element density at the origin (on the optic axis),

$I(r)$ = local picture element density at radius r from the origin, and


a = scaling factor.

27. Display device as defined in claim 21, characterized in that the picture elements are implemented using fiber optics.

REMARKS

The foregoing amendments are made for the sole purpose of reducing the filing fee of this application by eliminating the multiple claim dependencies.

Respectfully submitted,



Philip Rodman, Reg. No. 25,704
Attorney for Applicants

Dated: November 8, 2001

RODMAN & RODMAN
7 South Broadway
White Plains, New York 10601

Telephone: (914) 949-7210
Facsimile: (914) 993-0668
596-02

10018283 031802

CAMERA SYSTEM AND DISPLAY DEVICE

The present invention relates to a camera system as defined in the preamble of claim 1. Moreover, the invention relates to a display device as defined in claim 17.

Photography was invented in the early part of the 19th century. Fairly soon, silver halides (AgBr, AgCl) were distinguished from the spectrum of light-sensitive materials as they were found to be light-sensitive when dispersed in gelatin. The dispersion was spread on a glass plate, which formed the photosensitive projection surface of the camera. The glass plate was a straight plate, and an optical system was developed which focused the image onto the plate even through apertures larger than a pinprick.

The glass plate was followed by the film, the film was followed by the vidicon, and the vidicon was followed by the digital matrix. However, the image plane still remains a plane both in cameras for still pictures and those for moving pictures. In azimuthal projection, the illumination on the projection surface is proportional to the square of the angle of deflection as measured from the optical axis:

$$I = (L \cos^4 \varphi) / 4f(1 + m)^2$$

25

where

I is intensity at image plane,

L is luminance at target,

 φ is the angle of a focus-originated radius to the optical axis,

30

f is the aperture number, and

m is the conversion factor.

Especially in the case of wide-angle optics, problems are encountered in respect of uniformity of illumination in the image area. Further, wide-angle images with an angular field of the lens exceeding 100° are difficult to accomplish without substantial distortion of straight lines.

In prior art, both of the above-mentioned errors have been corrected by way of digital image processing.

The object of the invention is to eliminate
5 the drawbacks referred to above.

A specific object of the invention is to disclose a camera system and a corresponding display device that will make it possible to produce a wide-angle image in which illumination is uniform over the
10 entire image area and no lines in the image area are distorted.

As for the features characteristic of the camera and display device of the invention, reference is made to the claims.

15 The camera system of the invention comprises a camera provided with an optics system and a photo-sensitive image surface disposed in the vicinity of the optics system symmetrically relative to its optic axis, the image of the target refracted by the optics
20 being projected onto said image surface.

According to the invention, the photosensitive image surface is a concave spherical surface whose center of curvature is at the focus of the optics. The camera of the invention projects the image
25 onto the concave, focus-centered spherical surface, which functions as a light detector and may consist of light-sensitive detecting elements.

The camera system of the invention does not exhibit any anisotropy or geometric distortion, which
30 are typical of conventional photographic techniques. The invention makes it possible to implement different focal distances up to a 180° observation angle.

The invention has the advantage that, when a normal focal distance is used, with a 60 ° angular
35 field of the lens, the cosine error is avoided. Therefore, the isotropy of the image in respect of illumination is significantly better than in prior-art cam-

10018283-031802

eras. This is important in various image analysis applications in which the reflection density and color are used as a basis for making inferences about the target being analyzed.

5 When short focal distances (up to a 180° recording angle) are used, the invention has the advantage of eliminating the geometric distortions typical of current optical systems. When pictures are to be
10 printed and/or displayed using traditional planar display surfaces, suitable rectangular undistorted areas can be cut off from the image by using appropriate software. When a display device according to the invention is used in which the display surface is a concave spherical surface, no geometric distortions appear.
15

 When long focal distances are used, the visual effect that shortens the relative distances is eliminated.

 In an optical sense, projecting the image
20 onto a spherical surface is a less demanding task than conventional planar projection. Therefore, the cost of manufacturing an optical equipment free of aberrations for the system of the invention is lower than in the case of conventional optics.

25 In an embodiment of the camera system, the photosensitive image surface consists of a matrix of individual light-sensitive detecting elements, such as CCD elements.

 In an embodiment of the camera system, the
30 number of detecting elements is of the order of 100000 or more.

 In an embodiment of the camera system, the number of detecting elements has been so chosen that, in order to achieve a reasonable image quality, the
35 number is of the order of 10^4 - 3×10^4 , to achieve a good image quality, of the order of 10^6 - 2×10^6 , or to achieve a perfect image quality, of the order of 10^8 .

1001823-031803

In an embodiment of the camera system, the detecting elements are so arranged on the image surface that their density is at a maximum on the principal axis and diminishes from the principal axis toward the edge zones.

In an embodiment of the camera system, the density distribution of the detecting elements on the image surface is consistent with the function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2}, \text{ where}$$

I_0 = density of detecting elements at the origin (on the principal axis),

$I(r)$ = local density of detecting elements at radius r from the origin, and

a = scaling factor.

In an embodiment of the camera system, the detecting elements in the high-resolution area near the optic axis are so arranged that the point spread function (PSF) produced by the optics integrates over several detecting elements to prevent aliasing.

In an embodiment of the camera system, the optics are of a type using a so-called normal focal distance and the image surface is a spherical calotte with a recording angle (α) of the order of 60° ; and the camera comprises a shutter disposed between the optics and the image surface and provided with an adjustable aperture.

In an embodiment of the camera system, the recording angle of the image surface is 180° or less.

In an embodiment of the camera system, the optics comprise a lens with a short focal distance, such as a so-called fish-eye lens; the image surface is of a hemispherical shape and the recording angle is 180° , so that the camera is of a semispace recording type.

In an embodiment of the camera system, the camera is a digital camera which comprises means for

10018283-031802

digitization of the signals received from the detecting elements and means for transferring the digitized images to a computer. The image can be processed, transferred and printed in a digital form. The images
5 can be displayed using a spherical surface display as mentioned above or conventional display devices. They can also be printed in an undistorted form on paper using image printers.

In an embodiment of the camera system, the
10 camera is of a type designed to record moving pictures.

In an embodiment of the camera system, the camera is of a type designed to record still pictures.

In an embodiment of the camera system, the
15 camera is a monitoring camera.

In an embodiment of the camera system, the system comprises two semispace recording cameras directed in opposite directions to the record the whole space.

In an embodiment of the camera system, the
20 system comprises two adjacent semispace recording cameras directed in the same direction for the recording of a stereo image of the semispace.

According to the invention, the display surface of the display device used for the display of an image recorded using the above-mentioned camera system is a concave spherical surface.

The display device has the advantage that the illumination in the image is uniform over the entire
30 image area and the image is geometrically undistorted, thus requiring no corrective processing regarding the luminance level or contours of the picture.

In an embodiment of the display device, the display device is a monitor, such as a computer monitor or a television, having a screen of the shape of a
35 concave spherical calotte.

1001833.0180

In an embodiment of the display device, the display surface is a wall or ceiling surface of a room, onto which the image can be projected so as to allow it to be viewed simultaneously by a plurality of persons.

In an embodiment of the display device, the display device is a personal display visor or the like, in which the display surface is a hemispherical display surface having its center at the focal point of the eye.

In an embodiment of the display device, the display visor or the like comprises two hemispherical display surfaces having their centers at the focal points of the eyes, one display surface for each eye for the viewing of stereo pictures.

In an embodiment of the display device, the display surface consists of a matrix of individual picture elements.

In an embodiment of the display device, the number of picture elements is of the order of 100000 or more.

In an embodiment of the display device, the number of picture elements has been so chosen that, in order to achieve a reasonable image quality, the number is of the order of 10^4 - 3×10^4 , to achieve a good image quality, of the order of 10^6 - 2×10^6 , or to achieve a perfect image quality, of the order of 10^8 .

In an embodiment of the display device, the picture elements are so arranged on the display surface that their density is at maximum on the optic axis and diminishes from the optic axis toward the edge zones.

In an embodiment of the display device, the picture elements of the hemispherical display surface are larger in surface area in the edge zones than in the vicinity of the principal axis.

2087E0*E228T00T

In an embodiment of the display device, the density distribution of the picture elements on the display surface is consistent with the function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$

5

where

I_0 = picture element density at the origin (on the principal axis),

$I(r)$ = local picture element density at radius r from the origin, and

10

a = scaling factor.

In an embodiment of the display device, the picture elements are implemented using fiber optics.

Cameras and display devices constructed according to the invention are very well suited for use in robotics applications with a visual capacity. As there are no line distortions, corresponding correction computation is avoided. As there are no structural illumination differences between the optic axis and the peripheral image areas, the interpreting computation produces more accurate results than when a traditional camera is used. Cameras and display devices constructed according to the invention are also very well applicable for use in simulators in which stimuli are created artificially for the entire visual field (e.g. flight simulator). Similarly, it is possible to produce entertainment and computer game material that gives a person a sensation of being virtually present in the situation photographed by the camera and reproduced by the spherical display. Using a pair of adjacent cameras, it is possible to generate a three-dimensional perception that fills the entire field of vision.

In the following, the invention will be described in detail by the aid of a few examples of its embodiments with reference to the drawings, wherein

Fig. 1 presents a skeleton diagram of a first embodiment of the camera system of the invention,

Fig. 2 presents a skeleton diagram of a second embodiment of the camera system of the invention,

5 Fig. 3 presents a diagram illustrating the prevention of aliasing by means of the optics at points where the density of picture elements is at a maximum,

10 Fig. 4 presents a diagram illustrating a monitoring camera application of the camera system of the invention for the monitoring of a semispace in a room,

15 Fig. 5 presents a diagram illustrating a monitoring camera application of the camera system of the invention for the monitoring of the whole space in an open area,

20 Fig. 6 presents a diagram of a first embodiment of the display device of the invention, i.e. a spherical calotte type monitor or television and an optimal viewing line for it,

Fig. 7 presents a diagram of a second embodiment of the display device of the invention that allows the display of images to a plurality of viewers,

25 Fig. 8 presents a third embodiment of the display device of the invention, which is a personal display device for the display of stereo pictures,

30 Fig. 9 presents a diagram representing a fourth embodiment of the display device of the invention, which is a personal display device for the display of mono pictures.

Fig. 1 shows a camera 1 which comprises optics 2 with a so-called normal focal distance, presented in the figure as a simple lens. The camera 1 further comprises a photosensitive image surface 3, which is a concave spherical surface, onto which the optics 2 project the image of the target. The center of curvature of the image surface 3 is at the focal

point of the optics 2 on the optic axis L. With a lens 2 with a normal focal distance, a 60° recording angle is obtained, so the camera may have an image surface the shape of a spherical calotte. The camera further
5 comprises a shutter 4 provided with an adjustable aperture and disposed near the lens 2, between the lens 2 and the image surface 3.

The optics 2 in the camera 1 in Fig. 2 comprise a lens 5 with a short focal distance, a so-called fish-eye lens. The image surface 3 is of a hemispherical shape, so the camera is a semispace recording type of camera. The figure illustrates the projection of three targets I, I, III onto the hemispherical image surface. The recording angle is 180° .
10 The picture of target I on the principal axis L is recorded on the image surface 3 on the principal axis L. Targets II and III, located on opposite sides at angles of 90° , are projected onto the edges of the hemispherical image surface.

The cameras in Fig. 1 and 2 are preferably digital cameras capable of both still and moving image photography. The image surface 3 of the camera 1 is composed of individually placed digital detecting elements or it may be constructed using fiber optics. A
20 reasonable image quality is achieved using about 100 000 - 300 000 detecting elements on the image surface 3. A good image quality is achieved using about 1 - 2 million detecting elements. If perfect image quality is desired, then the number of detecting elements
25 should be of the order of 10^8 .

In cameras with a recording angle of 180° of the image surface 3 as illustrated in Fig. 2, which can see an entire semispace, with corresponding display devices, the position of the optic axis L corresponds to the point of sharp vision in the human eye
35 while the edge zones correspond to the less sharp peripheral vision. Therefore, the density of detecting

10018283.031809

elements on the image surface 3 may vary so that the density is at a maximum in the region of the optic axis, i.e. the resolution is high, being reduced towards the edge zones, where the resolution is lower.

5 For example, the Gaussian detecting element density distribution roughly corresponds to the frequency of utilization of the information when the image is being viewed. Other distributions are also possible. A varying detecting element density is suited for use e.g.
 10 in a remote control application in which a camera according to the invention installed on a robot photographs a real target while a person controlling the robot is watching the image produced by the camera, using a display device according to the invention. The
 15 distribution of the detecting element density on the image surface 3 may be e.g. as given by the following function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$

where

20 I_0 = detecting element density at the origin (on the principal axis),
 $I(r)$ = local detecting element density at radius r from the origin, and
 a = scaling factor.

25 If the shooting frequency of the camera is higher than half the sensor frequency, this will result in a so-called aliasing effect, in consequence of which, when the frequency increases, MTF, having dropped to zero, receives high positive values at
 30 higher frequencies. Especially when structured objects are being photographed, this causes a substantial deterioration of image quality. Aliasing can be avoided in the high-resolution portions of a variable-resolution camera by using an arrangement as illustrated in Fig. 3. The point spread function PSF of the
 35

optics is so adapted that it will integrate over a few adjacent detecting elements.

Fig. 4 and 5 illustrate the use of a semispace recording camera as presented in Fig. 2 as a wide-angle monitoring camera. Unlike previously known cameras which need to be moved to scan the surroundings, a camera like this can be fixedly and immovably mounted on the wall or ceiling of a room as shown in Fig. 4. When used e.g. as a monitoring camera in a bank, such an immovable camera is unnoticeable and difficult to detect. By using a pair of cameras looking in opposite directions as in Fig. 5, the whole open space around ($2 \times$ semispace) can be monitored. Using a single camera, a geometrically undistorted picture of the semispace is produced by a single shot without moving the camera. Using two semispace recording cameras directed in the same direction, it is possible to produce stereo pictures to create a three-dimensional impression.

Pictures taken with the camera of the invention can be viewed as normal planar copies by using a planar display or making a planar print-out. It is also possible to construct special display devices as presented in Fig. 6 - 9 for the viewing of pictures taken with the camera 1. In a display device 6 like this, the display surface 7 on which the pictures are viewed is a concave spherical surface.

Fig. 6 presents an embodiment in which the display device 6 is a monitor, such as a computer monitor or television, whose display screen is a display surface 7 having the shape of a concave spherical calotte. For this device, a preferable viewing distance is twice the radius r of the spherical calotte. The optimal viewing line is indicated by a broken line 8.

Referring to Fig. 7, in an application for a plurality of viewers, the display surface 7 may also

consist of a hemispherical wall or ceiling surface in a room (omni-theater), onto which the image can be projected for simultaneous viewing by several persons.

Fig. 8 and 9 present a display device 6 which is a personal display visor, display helmet or the like, in which the display surface 7 is a hemispherical display surface whose center is at the focal point of the eye. This device can be used e.g. for the presentation of virtual reality in entertainment and game applications and as a helmet display e.g. for air pilots.

In Fig. 8, the display visor or the like comprises two hemispherical display surfaces 7 having their centers at the focal points of the eyes, one display surface for each eye, for the viewing of stereo pictures, producing a three-dimensional impression.

In Fig. 9, the display visor is provided with a mono display with a single hemispherical display surface 7.

The display surface 7 in the display devices may consist of a matrix of individual picture elements. The number of picture elements has been so chosen that, to produce a reasonable image quality, the number is of the order of $10^4 - 3 \times 10^4$, to produce a good image quality, of the order of $10^6 - 2 \times 10^6$, or to produce a perfect image quality, of the order of 10^8 .

When the input device used is a variable-resolution camera, the display device can be constructed as a variable-resolution display. In a 180° display, the peripheral areas are implemented using fewer but larger picture elements, but so that they correspond to the high-resolution area in respect of image energy (= area of picture element \times maximum luminance).

In a variable-resolution display device 6, the picture elements may be so arranged on the display

surface 7 that their density is at a maximum on the principal axis L, diminishing from the principal axis toward the edge zones. The density distribution of the picture elements on the display surface is as expressed by the function:

5 pressed by the function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$

where

I_0 = picture element density at the origin (on the principal axis),

10 $I(r)$ = local picture element density at radius r from the origin, and
 a = scaling factor.

The invention is not restricted to the examples of its embodiments described above; instead, many variations are possible within the scope of the inventive idea defined in the claims.

15

10018223 031802

CLAIMS

1. Camera system comprising a camera (1) provided with an optics system (2) and a photosensitive image surface (3) disposed near the optics system symmetrically relative to its optic axis (L), the image of the object (K) refracted by the optics being projected onto the image surface, the photosensitive image surface (3) being a concave spherical surface whose center of curvature is at the focal point of the optics (2) and consisting of a matrix of individual photosensitive detecting elements, characterized in that the detecting elements are so arranged on the image surface (3) that their density is at a maximum on the optic axis (L) and diminishes from the optic axis toward the edge zones.

2. Camera system as defined in claim 1, characterized in that the density distribution of the detecting elements on the image surface (3) is consistent with the function:

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$

where

I_0 = density of detecting elements at the origin (on the optic axis),

$I(r)$ = local density of detecting elements at radius r from the origin, and

a = scaling factor.

3. Camera system as defined in claim 1 or 2, characterized in that photosensitive detecting elements are CCD elements.

4. Camera system as defined in claim 1 - 3, characterized in that the number of detecting elements is of the order of 100000 or higher.

5. Camera system as defined in claim 4, characterized in that the number of detecting elements has been so chosen that, to achieve a

reasonable image quality, the number is of the order of $10^4 - 3 \times 10^4$, to achieve a good image quality, of the order of $10^6 - 2 \times 10^6$, or to achieve a perfect image quality, of the order of 10^8 .

5 6. Camera system as defined in any one of claims 1 - 5, characterized in that the optics (2) has been so arranged that, in the high-resolution area near the optic axis (L), the point spread function (PSF) produced by the optics inte-
10 grates over several detecting elements to prevent aliasing.

 7. Camera system as defined in any one of claims 1 - 6, characterized in that the op-
15 tics (2) is of a type having a so-called normal focal distance and the image surface (3) is a spherical ca-
lotte with a recording angle of the order of 60° ; and that the camera comprises a shutter (4) disposed be-
tween the optics and the image surface and provided with an adjustable aperture.

20 8 Camera system as defined in any one of claims 1 - 6, characterized in that the re-
cording angle of the image surface (3) is 180° or less.

 9. Camera system as defined in any one of
25 claims 1 - 6, characterized in that the op-
tics (2) comprises a lens (5) with a short focal dis-
tance, such as a so-called fish-eye lens; that the im-
age surface (3) is of a hemispherical shape and the
recording angle is 180° , the camera thus being of a
30 semispace recording type.

 10. Camera system as defined in any one of
claims 1 - 9, characterized in that the
camera (1) is a digital camera which comprises means
for digitization of the signals received from the de-
35 tecting elements and means for transferring the digit-
ized images to a computer.

11. Camera system as defined in any one of claims 1 - 10, characterized in that the camera (1) is of a type for recording moving pictures.

5 12. Camera system as defined in any one of claims 1 - 11, characterized in that the camera (1) is of a type for recording still pictures.

13. Camera system as defined in any one of claims 1 - 12, characterized in that the camera (1) is a monitoring camera.

10 14. Camera system as defined in any one of claims 1 - 13, characterized in that the system comprises two semispace recording cameras (1) directed in opposite directions for the recording of the whole space.

15 15. Camera system as defined in any one of claims 1 - 14, characterized in that the system comprises two adjacent semispace recording cameras (1) directed in the same direction for the recording of a stereo image of the semispace.

20 16. Display device (6) for displaying an image recorded by a camera system as defined in any one of claims 1 - 15 on the display surface (7) of the display device, characterized in that the display surface (7) is a concave spherical surface.

25 17. Display device as defined in claim 16, characterized in that the display device (6) is a monitor, such as a computer monitor or a television, the screen of which is a display surface (7) having the shape of a concave spherical calotte.

30 18. Display device as defined in claim 16, characterized in that the display surface (7) is a wall or ceiling surface of a room, onto which an image can be projected so as to allow it to be viewed simultaneously by a plurality of persons.

35 19. Display device as defined in claim 16, characterized in that the display device is a personal display visor or the like, in which the

display surface (7) is a hemispherical display surface having its center at the focal point of the eye.

20. Display device as defined in claim 19, characterized in that the display visor or
5 the like comprises two hemispherical display surfaces (7) with their centers at the focal points of the eyes, one display surface being provided for each eye for the viewing of stereo images.

21. Display device as defined in any one of
10 claims 16 - 20, characterized in that the display surface (7) consists of a matrix of individual picture elements.

22. Display device as defined in claim 21, characterized in that the number of picture
15 elements is of the order of 100000 or higher.

23. Display device as defined in claim 21 or
22, characterized in that the number of picture elements has been so chosen that, in order to achieve a reasonable image quality, the number is of
20 the order of 10^4 - 3×10^4 , to achieve a good image quality, of the order of 10^6 - 2×10^6 , or to achieve a perfect image quality, of the order of 10^8 .

24. Display device as defined in any one of
claims 21 - 23, characterized in that the
25 picture elements are so arranged on the display surface (7) that their density is at a maximum on the optic axis (L) and diminishes from the optic axis toward the edge zones.

25. Display device as defined in claim 24,
30 characterized in that the picture elements of the hemispherical display surface (7) are larger in surface area in the edge zones than in the vicinity of the optic axis (L).

26. Display device as defined in claim 24 or
35 25, characterized in that the density distribution of the picture elements on the display surface is consistent with the function:

ART 34 AMDT

10016283-031806

ANT 94 A137

$$I(r) = I_0 e^{-a \left(\frac{\sqrt{x^2 + y^2 + z^2}}{r_0} \right)^2},$$




where

I_0 = picture element density at the origin (on the optic axis),

5 $I(r)$ = local picture element density at radius r from the origin, and
 a = scaling factor.

27. Display device as defined in any one of
claims 21 - 26, characterized in that the
10 picture elements are implemented using fiber optics.

10018283 031802

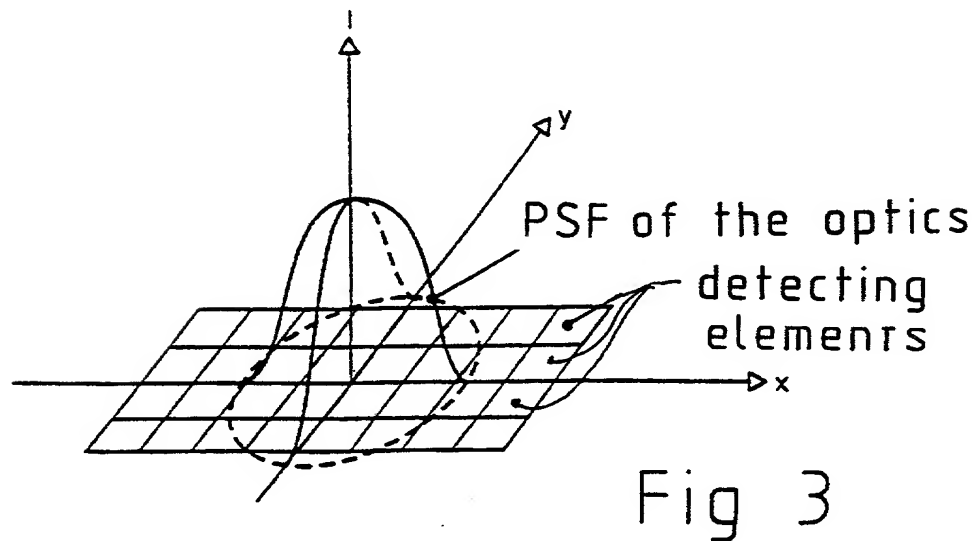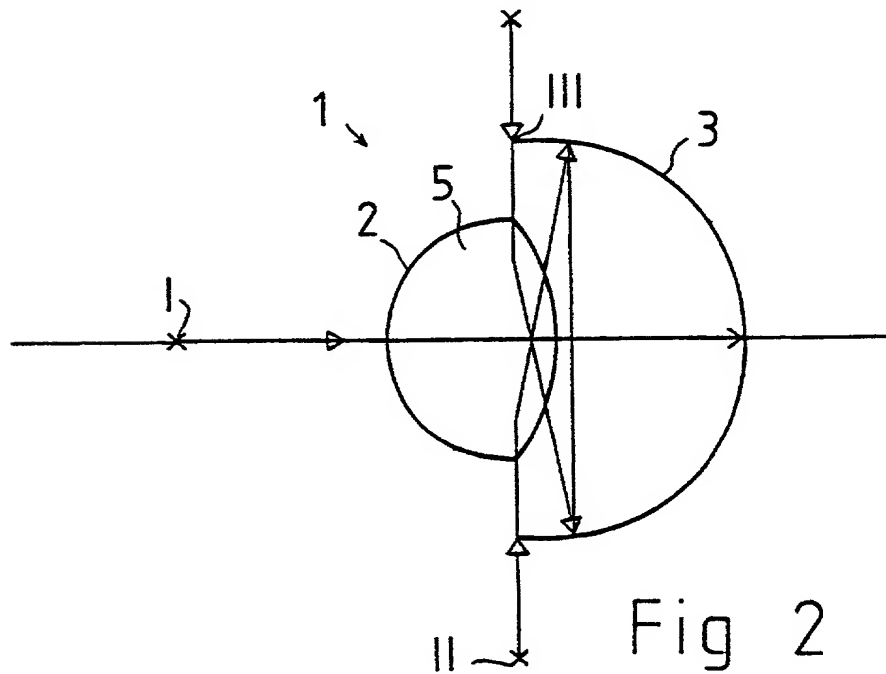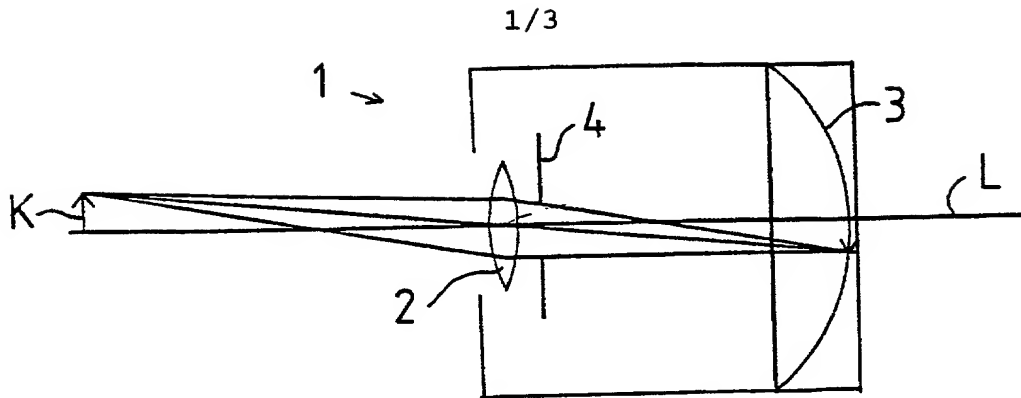

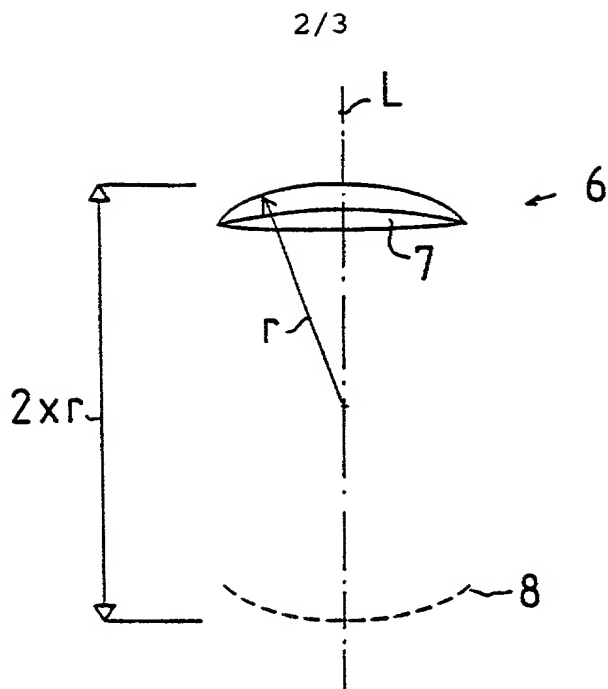


Fig 6




Fig 7

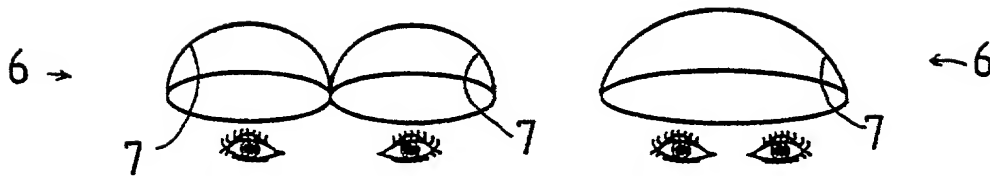


Fig 8

Fig 9

3/3

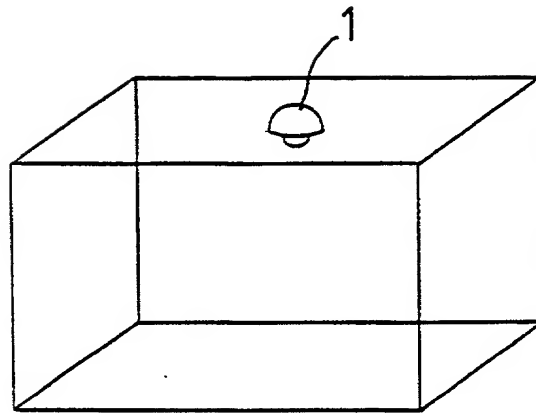


Fig 4

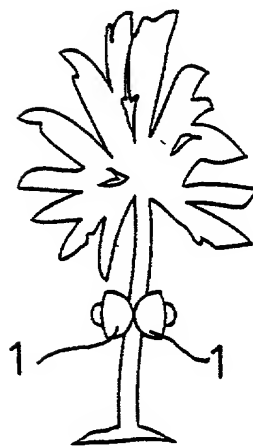


Fig 5

10018283-031802



13314J

**DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION
USING AN APPLICATION DATA SHEET (37 CFR 1.76)**

As the below named inventor(s), I/we declare that:

This declaration is directed to:

- ☒ The attached application, or
☐ Application No. _____, filed on _____,
☐ as amended on _____ (if applicable);

I/we believe that I am/we are the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought;

I/we have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment specifically referred to above;

I/we hereby appoint the following as our representative(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Philip Rodman (Reg. No. 25,704); Charles B. Rodman (Reg. No. 26,798)

Customer Representative No.: **020427**

Send Correspondence to: **Rodman & Rodman
7 South Broadway
White Plains, New York 10601**

Telephone Number: **(914) 949-7210**
Facsimile Number: **(914) 993-0668**

I/we acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me/us to be material to patentability as defined in 37 CFR 1.56, including material information which became available between the filing date of the prior application and the National or PCT International filing date of the continuation-in-part application, if applicable; and

I/we declare that all statements made herein of my/our own knowledge are true, all statements made herein on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME OF INVENTOR(S)

1. Inventor one: Hannu SAARELMA
Signature: [Signature] Citizen of: Finland
2. Inventor two: _____
Signature: _____ Citizen of: _____
3. Inventor three: _____
Signature: _____ Citizen of: _____
4. Inventor four: _____
Signature: _____ Citizen of: _____